
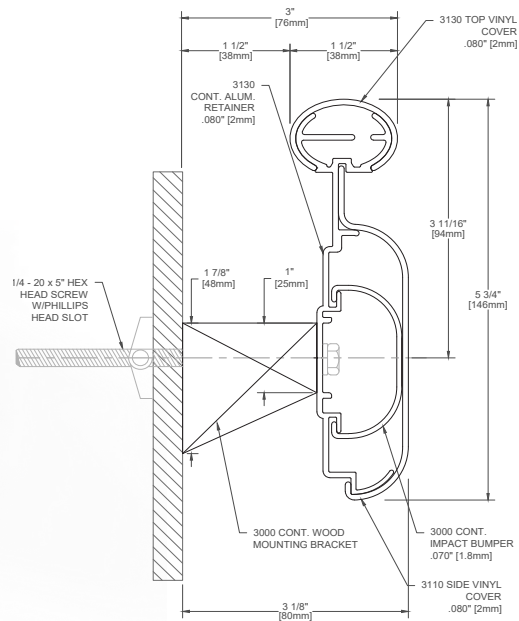


3130VV/3130VFV/3130FVV/3130FVHV Handrail

With Ligature Resistant* Bracket

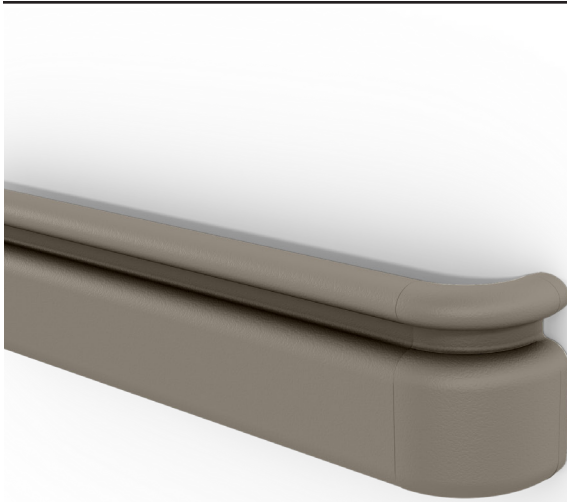

Product Details

- 5-3/4" (148mm) height, 1-1/2" (38mm) x 1-1/16" (27mm) oval gripping diameter, extends 3-3/16" (80mm) from the wall
- .080" (2mm) thick, scratch and stain resistant rigid vinyl cover
- Solid wood ligature resistant* bracket.
- Mounted on a sturdy .080" (2mm) thick, continuous aluminum retainer
- Manufactured in 12' (3.66m) standard lengths
- All mounting fasteners are included with each order

* While these products are designed for behavioral health applications, they do not guarantee patient safety.

Options

- 3130VV - Available in all Standard Inpro Solid Colors
- 3130VFV - Top available in Standard Inpro Solid Color (V).
- Bottom available in select Inpro Woodgrains (FV) & Metallics**
- 3130FVV - Top available in select Standard Inpro Woodgrains (FV) & Brushed Metallics**.
- Bottom available in Standard Inpro Solid Colors bottom (V)
- 3130FVHV - Available in select Standard Inpro Woodgrains & Brushed Metallics** top & Select Standard Inpro Woodgrains & Brushed Metallics**

**Reference Inpro Door + Wall Color Guide for More Information

Testing & Certification

- UL-723 (ASTM E-84) Class A Classified
- Self Extinguishing: Tested in accordance with the procedures specified in ASTM D-635-74
- Impact Strength: Tested in accordance with the procedures specified in ASTM D-256
- Meets UL GREENGUARD Gold low-VOC emission standards. UL GREENGUARD Gold Certification ensures that products are acceptable for use in places such as schools and healthcare facilities, and that they comply with CDPH Standards.
- Chemical & Stain Resistance: Tested in accordance with applicable provisions of ASTM D-543
- ASTM G-21 and ASTM G-22 Tested does not support fungal or bacterial growth
- Meets ADA and ANSI criteria



IPC.3953/REV.3